



LTZGK100-15-5-B-24V

LED ringlight, 5 LED rows, outer diameter 103 mm, 15°, blue, 24V

SPECIFICATIONS

Optical specifications

Light color, peak wavelength		blue, 470nm
Working distance	(mm)	128
Lighting area		
Inner	(mm)	53
Outer	(mm)	99
Emission angle	(deg)	15

Electrical specifications


Illumination extension cable	Extension cable must be ordered separately 4	
Continuous mode		
Supply voltage	(V)	24
Current	(mA)	570
Power consumption	W	13.7
Pulsed mode		
Supply voltage 1	(V)	36
Max pulse current 2	(mA)	1710

Mechanical specifications

Inner diameter	(mm)	48
Outer diameter	(mm)	103
Height	(mm)	24

Environment

IP rating	00
-----------	----

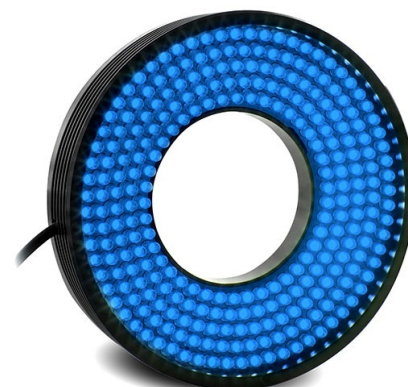

NOTES

1. With constant driving voltage (36V recommended, 48V max). Duty cycle = 0-10 %. Max pulse width = 10 ms.
2. With constant driving current. Duty cycle = 0-10 %. Max pulse width = 10 ms.

ORDERING INFORMATION

All accessories including lighting extension cables (CB series) , diffusers (DFLT series) , polarizers (PLLT series) and mounting brackets (CMLT series) must be ordered separately.

COMPATIBLE PRODUCTS



LTDV1CH-17V Strobe controller 1 channel variable current 5 mA - 17A



DFLTZGK100-15-5 Diffuser for LED ringlight, 5 LED rows, outer diameter 103 mm, 15°



PLLTZGK100-15-5 Polarizer for LED ringlight, 5 LED rows, outer diameter 103 mm, 15°