

## High Power strobed LED backlight, 144 x 108 mm illumination area, green



### SPECIFICATIONS

#### Lighting specifications

|                              |                     |               |
|------------------------------|---------------------|---------------|
| Modules                      |                     | 3x3           |
| Illumination area width      | (mm)                | 144           |
| Illumination area height     | (mm)                | 108           |
| Number of LEDs               |                     | 432           |
| Light color, peak wavelength |                     | green, 522 nm |
| Spectral FWHM                | (nm)                | 33            |
| Illuminance <sup>1</sup>     | (klux)              | 150           |
| Irradiance <sup>1</sup>      | (W/m <sup>2</sup> ) | -             |
| Diffuser                     |                     | yes           |
| Collimation film             |                     | no            |

#### Electrical specifications

|                                |         |                                       |
|--------------------------------|---------|---------------------------------------|
| Power supply mode              |         | Strobe only, constant current driving |
| Peak power consumption         | (W)     | 544.3                                 |
| Max pulse current <sup>2</sup> | (A)     | 16.2                                  |
| Typical pulse voltage          | (V)     | 33.6                                  |
| Max pulse duration             | (ms)    | 1                                     |
| Max duty cycle                 | (%)     | 1.5                                   |
| Max continuous current         | (mA)    | 45                                    |
| Estimated MTBF <sup>3</sup>    | (hours) | > 50000                               |
| Connector                      |         | M8                                    |
| Included cable                 |         | CBLT003                               |

### KEY ADVANTAGES

#### Excellent uniformity

#### Test report with measured uniformity

#### Ultra high-power light output and strobe mode operation

For inspection and measurement of fast moving objects and an extended LED lifetime

#### Suitable for frequent cleaning

Thanks to the optical grade and scratch resistant protective cover

#### Wide selection and modular design

Size options range from 48 x 36 to 288 x 216 mm available in red, white, green, blue and infrared

#### Compact design with reduced thickness (26 mm)

#### Special continuous alignment mode

#### Optional integrated collimation film

The **LTBP series** offers high power LED backlights designed to provide exceptional illumination performances and excellent uniformity.


#### Mechanical specifications

|                             |      |                       |
|-----------------------------|------|-----------------------|
| Length                      | (mm) | 156.0                 |
| Width                       | (mm) | 128.0                 |
| Height                      | (mm) | 26.0                  |
| Mass                        | (g)  | 886                   |
| Clamping system             |      | 4x M6 threaded holes  |
| <b>Environment</b>          |      |                       |
| Operating temperature       | (°C) | 0-40                  |
| Storage temperature         | (°C) | 0-50                  |
| Operating relative humidity | (%)  | 20-85, non condensing |
| IP rating                   |      | IP40                  |
| Installation                |      | Indoor use only       |

#### Eye safety

|   |        |
|---|--------|
| Risk group (CEI EN 62471:2010)  | Exempt |
| <sup>1</sup> Minimum value, at max driving current, on emitting surface. Where n.a. is reported data is available upon request. |        |
| <sup>2</sup> Models where two currents are listed (such as LTBP240180-R) feature two separate channels.                         |        |
| <sup>3</sup> At 25°C  |        |

**CONNECTOR PINOUT**

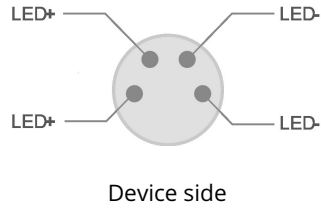

| Function | Cable color |
|----------|-------------|
| LED +    | Brown       |
| LED +    | White       |
| LED -    | Blue        |
| LED -    | Black       |


**COMPATIBLE PRODUCTS**

Full list of compatible products available [here](#).




A wide selection of innovative machine vision components.


**LED color spectrum**

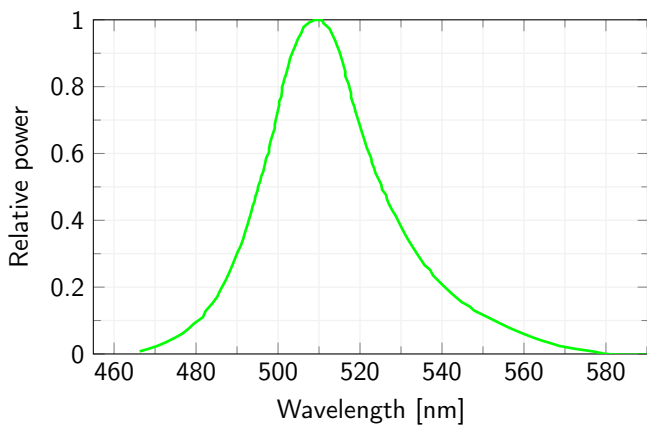

**Forward Current Characteristics**

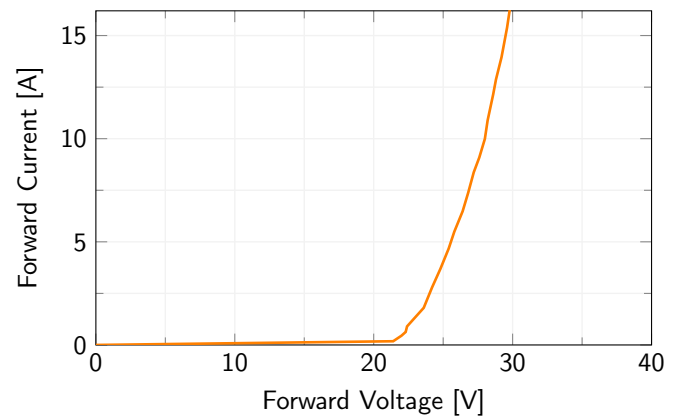

**Emission angle**

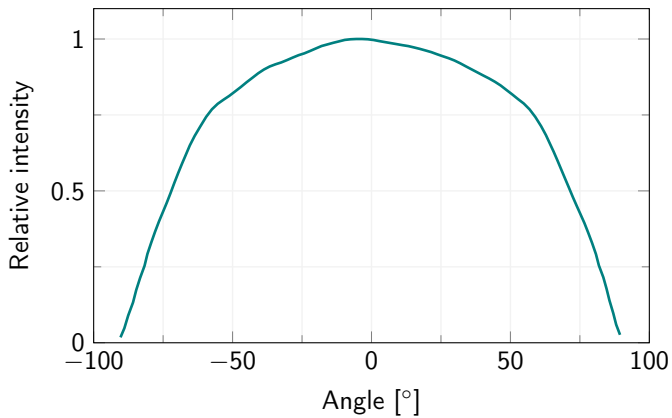

All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only. Data are reported by design, actual lens performance may vary due to manufacturing tolerances.